

## Sealed double 2-way switch 10AX 250V ~ . IP54. Surface.

Sealed double 2-way switch 10AX 250V ~ . IP54. Surface. Tube inputs up to Ø 20 mm. External dimensions 65 x 80 x 55 mm. Screw connection.



## Features

Common applications	Domestic / tertiary outdoor environment (garden, swimming pool, parking, public road, etc.)
Mechanism type	Switch
Type of installation	Surface
Rated current	10AX
Nominal voltage	250V~ (50/60 Hz)
Connection type	Screw connection
Tube inlet	Up to Ø 20 mm
Flexible cable section	Up to 2.5 mm <sup>2</sup>
Rigid cable section	Up to 2.5 mm <sup>2</sup>
Type of operation	Rocker key
Dimensions	65 x 80 x 55
Monobloc (with frame included)	Yes
Frame color	Grey

## Technical data

Insulation class	Class II
Fire resistance (GWEPT)	650/850 °C
Heat resistance (Ball pressure)	70/125 °C

Installation temperature	-5 °C -> +60 °C
Free of halogens	Yes

## Regulations

CE marking	Yes
According to Regulations UNE/EN	UNE-EN 60669-1:2018
In accordance with the Low Voltage Electrotechnical Regulations (REBT)	Yes
VDE certificate	Yes
According to European Directive 2014/35 / EU. Low voltage directive	Yes


## Sustainability

According to European Directive 2011/65/UE (RoHS)	Yes
According to European Directive 2012/19/UE (RAEE2)	Yes
According to Regulations (RoHS)	UNE-EN IEC 63000:2022

## Logistics and packaging

Unit EAN code	8423220078451
EAN code container	8423220069251
EAN code packaging	18423220069258
Units packaging	20
Units carton	100
Pallet Units	3000
Packaging Measurements cm	33,5x19,5x12
Packaging Measures cm	61,5x34,5x22
Unit weight (g)	115
Container Weight (Kg)	2,41
Packaging Weight (Kg)	12,59
Tariff code	85366990

## Sketch

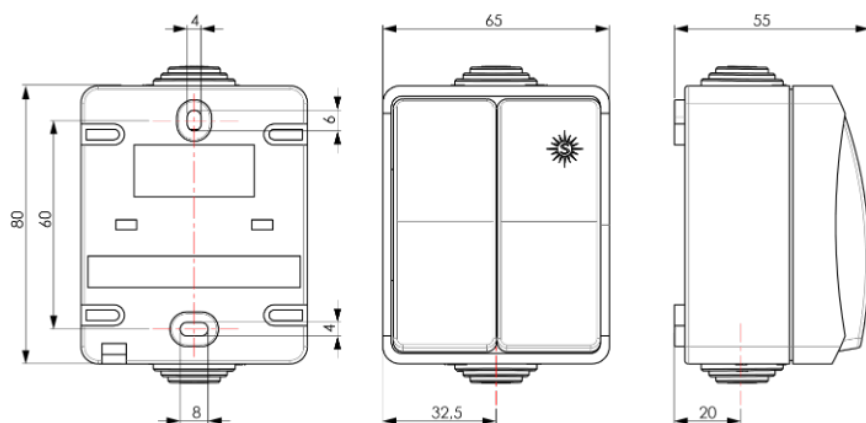

## Documentation and downloads



Commercial doc. (2.27MB)



Safety Information (0.38MB)



Watertight switch IP54/44 (Solera)



Assembly watertight switches IP54/44 (Solera)