# 3313

## Sealed double 2-way switch 10AX 250V ~ . IP54. Surface.



Sealed double 2-way switch 10AX 250V ~ . IP54. Surface.Tube inputs up to Ø 20 mm. External dimensions 65 x 80 x 55 mm. Screw connection.

## Features

| | |
|---|---|
| Common applications | Domestic / tertiary outdoor environment (garden, swimming pool, parking, public road, etc.) |
| Mechanism type | Switch |
| Type of installation | Surface |
| Rated current | 10AX |
| Nominal voltage | 250V~ (50/60 Hz) |
| Connection type | Screw connection |
| Tube inlet | Up to Ø 20 mm |
| Flexible cable section | Up to 2.5 mm² |
| Rigid cable section | Up to 2.5 mm² |
| Type of operation | Rocker key |
| Dimensions | 65 x 80 x 55 |
| Monobloc (with frame included) | Yes |
| Frame color | Grey |

## Technical data

| | |
|---|---|
| Insulation class | Class II |
| Fire resistance (GWEPT) | 650/850 ºC |
| Heat resistance (Ball pressure) | 70/125 ºC |

Portalámparas y Accesorios Solera S.A.U. Pol. Ind. Fuente del Jarro C/ Villa de Madrid, 53 46988 Paterna (Valencia) España
+34 961 322 301 | solera@psolera.com | www.psolera.com

| | |
|---|---|
| Installation temperature | -5 ºC -> +60 ºC |
| Free of halogens | Yes |

## Regulations

| | |
|---|---|
| CE marking | Yes |
| According to Regulations UNE/EN | UNE-EN 60669-1:2018 |
| In accordance with the Low Voltage Electrotechnical Regulations (REBT) | Yes |
| VDE certificate | Yes |
| According to European Directive 2014/35 / EU. Low voltage directive | Yes |

## Sustainability


| | |
|---|---|
| According to European Directive 2011/65/UE (RoHS) | Yes |
| According to European Directive 2012/19/UE (RAEE2) | Yes |
| According to Regulations (RoHS) | UNE-EN IEC 63000:2022 |

## Logistics and packaging

| | |
|---|---|
| Unit EAN code | 8423220078451 |
| EAN code container | 8423220069251 |
| EAN code packaging | 18423220069258 |
| Units packaging | 20 |
| Units carton | 100 |
| Pallet Units | 3000 |
| Packaging Measurements cm | 33,5x19,5x12 |
| Packaging Measures cm | 61,5x34,5x22 |
| Unit weight (g) | 115 |
| Container Weight (Kg) | 2,41 |
| Packaging Weight (Kg) | 12,59 |
| Tariff code | 85366990 |

# 3313

## Sketch

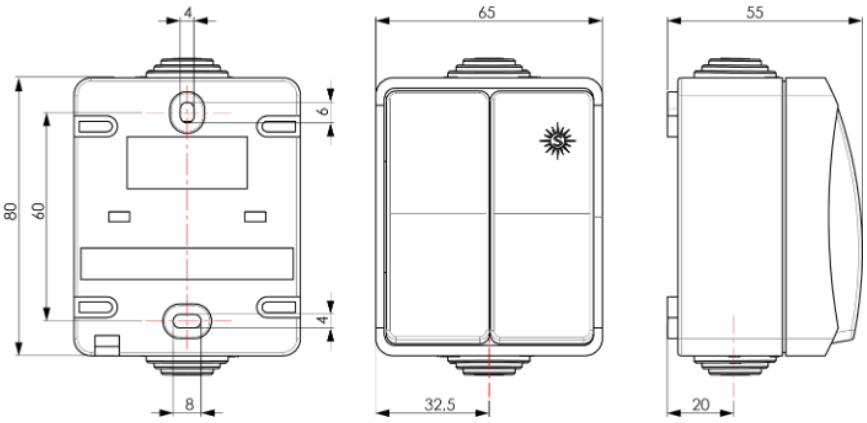


## Documentation and downloads

- Assembly instructions (0.58MB)
- Commercial doc. (2.27MB)
- Safety Information (0.38MB)
- Mechanism scheme table (0.47MB)
- Watertight switch IP54/44 (Solera)
- Assembly watertight switches IP54/44 (Solera)