



Solera[®]



SEALED BOXES



- Halogen Free. GWT 650 °C. **Sans Halogène**
- GWT 960 °C under demand. **À demande**
- 70 °C Ball pressure test. **Test de la Boule**
- Dimensional stability - 25 °C to 85 °C. **Stabilité Dimensional**

- Complies with EN 60670. **En accordance avec**
- Complies with Directive 2011/65/EU. **En accordance avec**
- Colours: RAL 7035 & 9011.
- Transparent and Fume Lid available. **Couvercle Transparent ou Fumé**



Different cover heights*

Couvercle diferenr profondeur

RAL 9011 black*

RAL 9011 Noir

Transparent or Fume lid*

Couvercle transp. ou fumé



DIN rail 35 mm*

Rail DIN 35 mm *



Cones for glands*

Gradins pour presse-étoupe



Quickfix*



* Available for different boxes see table in last page. **Voir table dans la dernière page**



Fast turning screw / Vis Rapide

1/4 turn fast screw / Vis 1/4 de Tour




Eassy cutting / Gradins facile á coupe

Cones, marked with metric / Metriques indiqué



Resistant / Résistante

Highly resistant due to thickness of material / Grande Épaisseur qui renforce la boîte

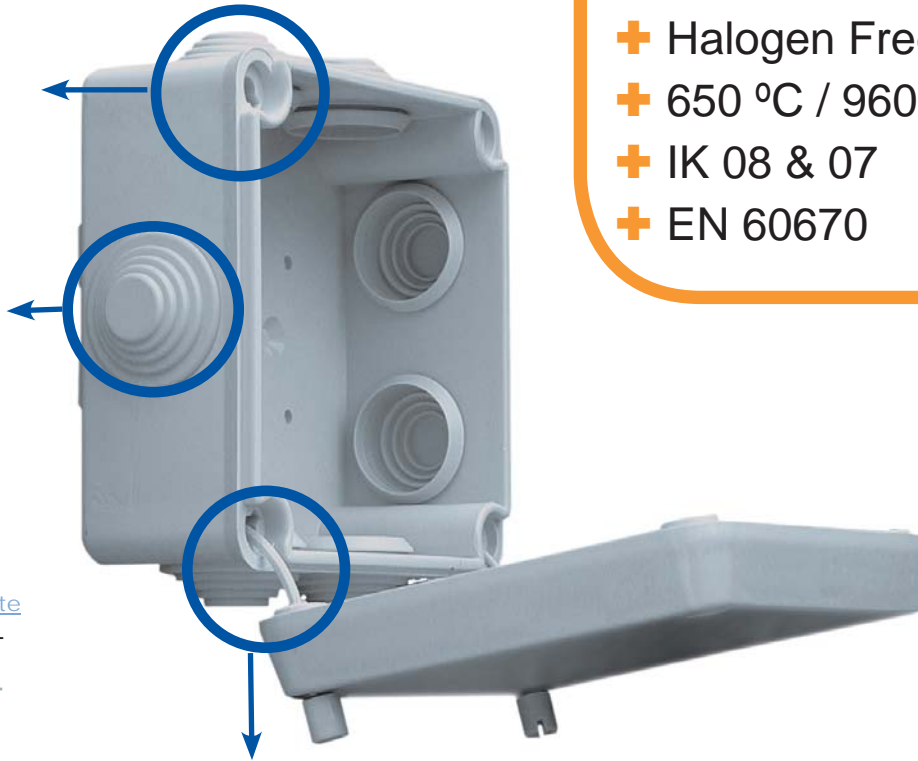

Security screw / Vis securité

lid and box always attached by security screw. / Couvercle toujours fixé á la boîte pair un vis de securité

Characteristics Caractéristique

- + IP 65 & IP 55
- + Halogen Free
- + 650 °C / 960 °C
- + IK 08 & 07
- + EN 60670



Accessories

Galvanised steel plates Plaque metalique Galvanisé



PM815/1 for ref 715/815
 PM816/1 for ref 716/816
 PM817/1 for ref 717/817
 PM886/1 for ref 686/886
 PM887/1 for ref 887/888
 PM820/1 for ref 820
 PM821/1 for ref 821

1mm thick, includes screws / Epaisseur 1mm, vis incl

Classic Terminal Blocks Clasique terminal



92104 (black), 92004 (white)- 4mm2
 92106 (black), 92006 (white)- 6mm2
 92110 (black), 92010 (white)-10mm2
 92116 (black), 92016 (white)-16mm2
 92125 (black), 92025 (white)-25mm2

Fast connecting Terminal Quick terminal



CLE24 -2x4 flex cable
 CLE34 -3x4 flex cable
 CLE54- 5x4 flex cable

Cable glands Presse-étoupe



KIT P16 G (M16)
 KIT P20 G (M20)
 KIT P25 G (M25)
 KIT P32 G (M32)



Mounted Boxes Boîtes Montage



Sealed Boxes Range

(1) All available at 960°C, add GW / Toutes disponibles à 960°C, ajouter GW

Inside Dimensions (mm) Length x Height x Depth Largeur x Hauteur x Prof.	With CONES GRADDINS			Without CONES Sans GRADDINS			DIN rail 35 mm	IP	IK	Seal Scellé
	Grey RAL 7035	Black RAL 9011	Transparent Lid*	Grey RAL 7035	Black RAL 9011	Transparent Lid*				
Ø 70 x 35	665 / 665Q							55	07	Not
Ø 70 x 35	100665 / 100665Q							55	07	Not
80 x 80 x 35	604 / 604Q			604 C				55	07	Not
100 x 100 x 45	615 / 615Q			615 C				55	07	Not
100 x 100 x 55	715	715 N						55	07	Yes
100 x 100 x 55				815	815 N	6815		65	07	Yes
153 x 110 x 55	616							55	07	Not
153 x 110 x 65	716	716 N	716 TP					55	07	Yes
153 x 110 x 65				816	816 N	6816		65	07	Yes
160 x 135 x 70	717	717 N	717 TP				717G	55	07	Yes
160 x 135 x 70				817	817 N	6817	817 G	65	07	Yes
220 x 170 x 80	686	686 N	686 TP				686G	55	07	Yes
220 x 170 x 80				886	886 N	6886	886 G	65	07	Yes
220 x 170 x 140	686 A		686 ATP				686AG	55	07	Yes
220 x 170 x 140				886 A		886 ATP	886 AG	65	07	Yes
310 x 240 x 125	100888						100888GH	55	07	Yes
310 x 240 x 125				100887	100887N	100887 TP	100887GH	65	07	Yes
263 x 493 x 129				820 P				65	08	Yes
355 x 493 x 129				821 P				65	08	Yes

A = High Lid / Couvercle Profond
 N = Black / Noir
 TP= Transparent Lid / Couvercle Transparent
 G = Din rail

Q= Quick fix.
 *Transparent Lid also Available in Fume / *Couvercle transparent, disponible en fumée aussi