

Sealed connection box without cones. Grey colour. External dimensions 215x200x140 mm
Internal dimensions 207 x 192 x 131 mm

Sealed connection box without cones. Grey colour.IP65. IK08. With centricity points. External dimensions 215x200x140 mm Internal dimensions 207 x 192 x 131 mm. Quick closure with stainless screws.



Features

Installation method	Surface
Use	Industrial
Location type	Exterior and interior
Dimensions outside (mm) (width x height x depth)	215x200x140
Dimensions inside (mm) (Width x Height x Depth)	207x192x131.
Case material	Thermoplastic
Case color	Grey (RAL7035)
Cap color	Grey (RAL 7035)
Battens included	No
Ticket type	Pre-punched
No. of inlets and size (mm)	SUP/INF: 1xØ32-40, 2xØ25, 2xØ20
Fixation System (For surface)	Ref.KIT1300SOP (not included). For all INDUBOX except for Ref. 1303 and 1304
Sealable	Yes
Linkable	Vertically and horizontally
Lid closure system	Ultra-fast metal screw
Possibility of mounting strips	Yes (not included)
Possibility of mounting DIN rail	Yes (not included)
Valid for photovoltaic installations	Yes
Common applications	Industrial environments (factories, warehouses, etc.)

Technical data

Protection Degree (IK)	IK08
Impact shock resistance	Strong
Insulation class	Class II
Fire resistance (GWEPT)	650 °C
Heat resistance (Ball pressure)	70 °C
UV resistance	Yes
Free of halogens	Yes
Suitable for saline environments	Yes

Regulations

CE marking	Yes
UK marking	Yes
CMim marking	Yes
According to Regulations UNE/EN	UNE-EN 60670-1:2022 UNE- EN 60670-22:2007
In accordance with the Low Voltage Electrotechnical Regulations (REBT)	Yes
According to European Directive 2014/35 / EU. Low voltage directive	Yes

Sustainability


According to European Directive 2011/65/UE (RoHS)	The Directive 2011/65/EU (RoHS II) is not applicable as it does not correspond to the definition of Electrical and Electronical Equipment (EEE) as per article 3.1
According to European Directive 2012/19/UE (RAEE2)	Not applicable because it does not meet the definition of Electrical and Electronic Equipment (EEE) as described in Article 3.1(a) of Directive 2012/19/EU (WEEE II).

Logistics and packaging

Unit EAN code	8423220084452
EAN code container	8423220084452
EAN code packaging	18423220084459

Units packaging	1
Units carton	18
Pallet Units	216
Packaging Measures cm	59,5x39,5x64
Unit weight (g)	732
Container Weight (Kg)	0,746
Packaging Weight (Kg)	14,678
Tariff code	85381000

Sketch

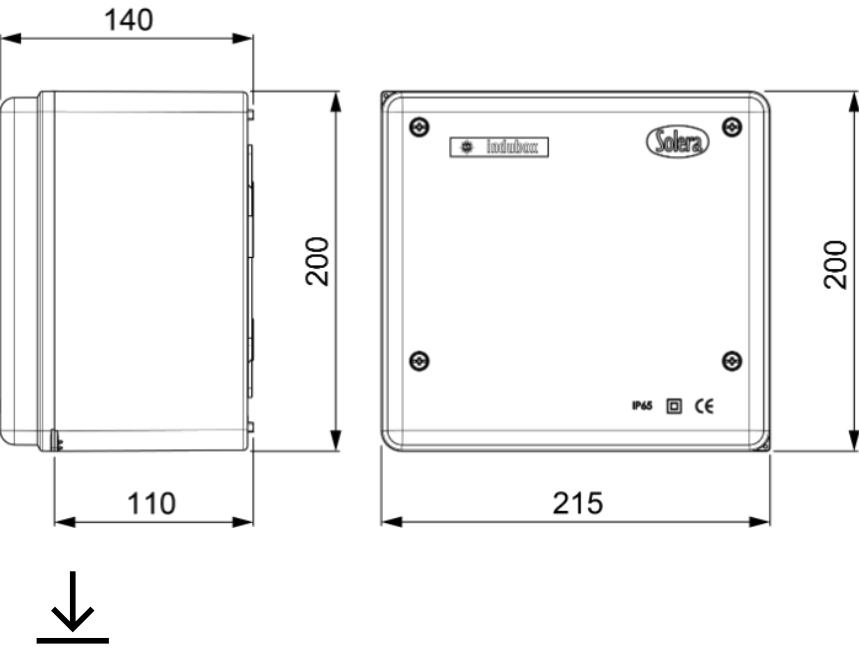

Documentation and downloads

-  Assembly instructions (1.16MB)
-  Safety Information (0.38MB)
-  Series replenishments (0.05MB)
-  Commercial doc. (6.32MB)
-  Certificate (0.48MB)
-  Industrial cabinets IP65, IK08 (Solera) (Ed. 2024)