

Miniature Circuit Breaker 1P+N, 20A. Breaking capacity 6kA. C curve.

Miniature Circuit Breaker 1P+N, 20A. Breaking capacity 6kA. C curve. 1 module.
230V AC (50 - 60 Hz).



Features

Common applications	Indoor domestic / tertiary environment (Interior of home, offices, shops, etc.)
Mechanical durability	20.000 cycles
Protection type (modular)	Magnetothermic switch
No. of poles	1P + N
Modules (18 mm)	1
Neutral position	Left
Network type	Alternating current (ac)
Trigger curve	C
Short circuit capacity	6 kA
Fixation	35mm DIN rail
Possibility of using pin type combs	Yes
Nominal current	20A
Nominal voltage	230 Vca - (50/60 Hz)

Technical data

Fire resistance (GWEPT)	960 °C
Ambient operating temperature	-5 °C ; +40 °C
Free of halogens	Yes

Regulations

CE marking	Yes
UK marking	Yes
CMim marking	Yes
According to Regulations UNE/EN	UNE-EN 60898-1:2020 (versión corregida Febrero 2024).
In accordance with the Low Voltage Electrotechnical Regulations (REBT)	Yes
According to European Directive 2014/35 / EU. Low voltage directive	Yes


Sustainability

According to European Directive 2011/65/UE (RoHS)	Yes
According to European Directive 2012/19/UE (RAEE2)	Yes
According to Regulations (RoHS)	UNE-EN IEC 63000:2022

Logistics and packaging

Unit EAN code	8423220093102
EAN code container	8423220091627
EAN code packaging	18423220091624
Units packaging	12
Units carton	180
Pallet Units	5400
Packaging Measures cm	43x20,5x27
Unit weight (g)	126,8
Container Weight (Kg)	1,5216
Packaging Weight (Kg)	22,962
Tariff code	85362010

Sketch

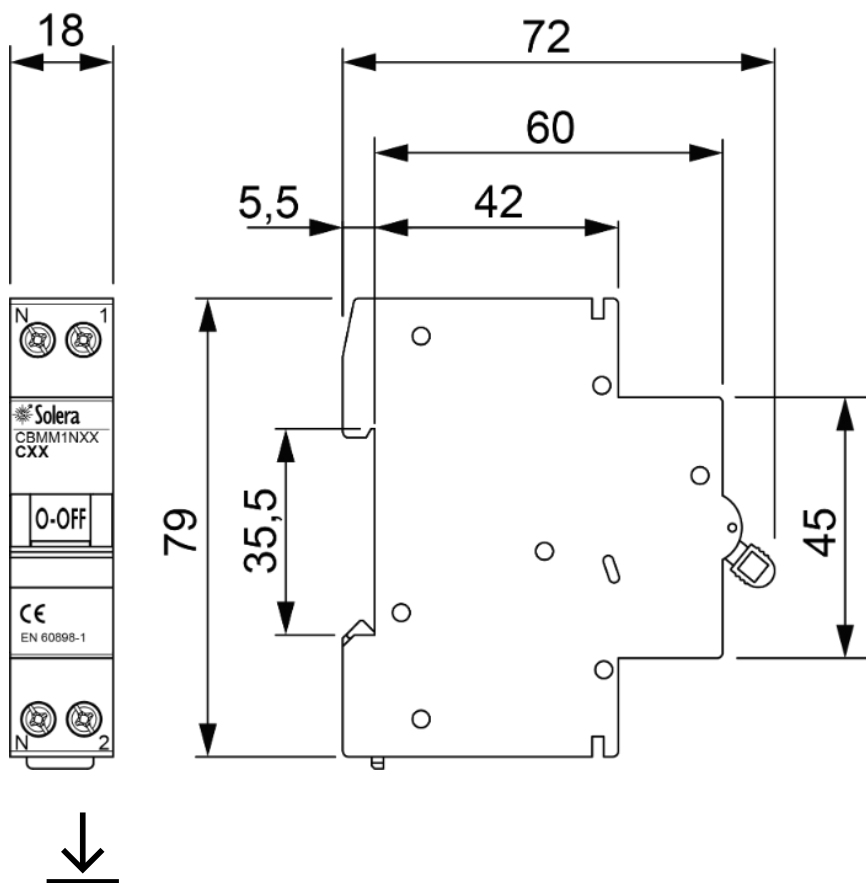

Documentation and downloads



Assembly instructions (0.26MB)



Safety Information (0.38MB)