

Flush connection box. Ø 80 mm. Threaded cover.

Flush connection box. Ø 80 mm. Threaded cover. Depth 40 mm. 8 inputs for tube Ø 25 mm.



Features

Installation method	Flush in work
Use	Domestic / Tertiary
Location type	Inside
Dimensions inside (mm) (Width x Height x Depth)	Ø 80x40
Case material	Insulation
Case color	Black
Cap color	White
No. of inlets and size (mm)	8xØ 25
Lid closure system	Threaded
Common applications	Indoor domestic / tertiary environment (Interior of home, offices, shops, etc.)

Technical data

Impact shock resistance	Medium
Insulation class	Class II
Fire resistance (GWEPT)	650 °C
Heat resistance (Ball pressure)	70 °C
Work stress	400 Vac
Free of halogens	Yes

Regulations

CE marking	Yes
UK marking	Yes
CMim marking	Yes
According to Regulations UNE/EN	UNE-EN 60670-1:2022 UNE- EN 60670-22:2007
In accordance with the Low Voltage Electrotechnical Regulations (REBT)	Yes
According to European Directive 2014/35 / EU. Low voltage directive	Yes



Sustainability

According to European Directive 2011/65/UE (RoHS)	The Directive 2011/65/EU (RoHS II) is not applicable as it does not correspond to the definition of Electrical and Electronical Equipment (EEE) as per article 3.1
According to European Directive 2012/19/UE (RAEE2)	Not applicable because it does not meet the definition of Electrical and Electronic Equipment (EEE) as described in Article 3.1(a) of Directive 2012/19/EU (WEEE II).

Logistics and packaging

Unit EAN code	8423220240360
EAN code container	8423220004146
EAN code packaging	18423220004143
Units packaging	20
Units carton	320
Pallet Units	4800
Packaging Measures cm	59,5x39,5x59,5
Unit weight (g)	42
Container Weight (Kg)	0,85
Packaging Weight (Kg)	14,73
Tariff code	85371098

Sketch

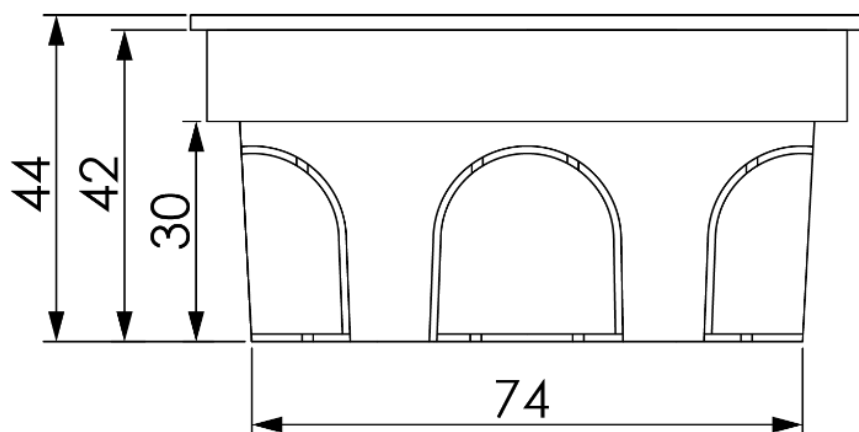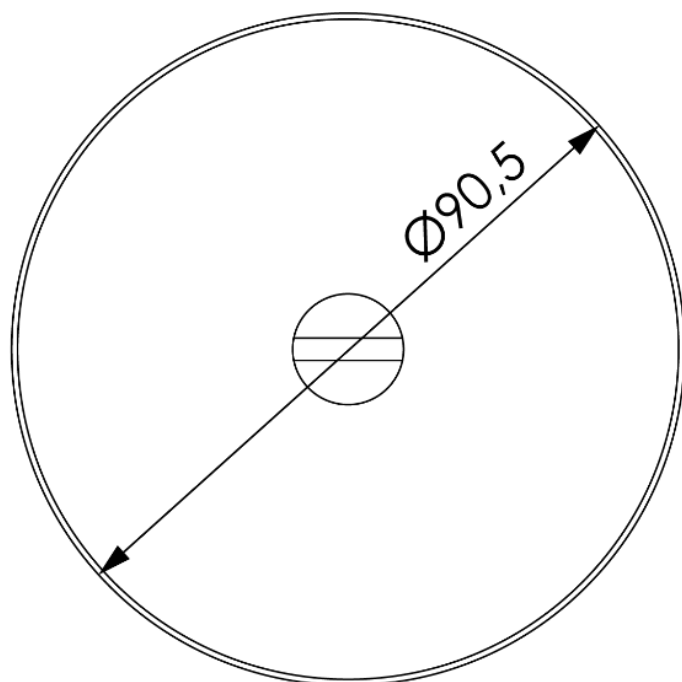

Documentation and downloads



Assembly instructions (0.17MB)



Safety Information (0.38MB)