

## Flush distribution box in hollow partition of 20 modules + 4 sealables.

Flush distribution box in hollow partition of 20 modules + 4 sealables. Fixing system using black multi-perforated support. 2 rows. White frame and fume-coloured door. Flush dimensions 320 x 420 x 75 mm.



## Features

Installation method	For hollow wall.
Use	Domestic / Tertiary
Location type	Inside
No. Modules (18 mm)	20+4
Modules per row	14 + (6+4)
Metallic DIN profile	Yes
Dimensions gap (mm) (Width x Height x Depth)	320x420x75
Dimensions (mm)	See sketch
Case material	Insulation
Frame and door material	Insulation
Case color	Blue
Door color	Fume
Door opening	Horizontal
Battens included	No
Ticket type	Unfathomable
Linkable	Vertically and horizontally
Lid closure system	Metal claw
Door closing system	Handle
Reversible door	Yes

Possibility of mounting strips	Yes (not included)
Possibility of putting lock	Yes (not included)
Possibility of mounting DIN rail	Yes (included)
Fixing system to the hollow partition.	Multi-perforated support for hollow wall black colour.
Valid for photovoltaic installations	Yes
Common applications	Indoor domestic / tertiary environment (Interior of home, offices, shops, etc.)
Additional dimensions (mm)	See sketch

## Technical data

Protection Degree (IK)	IK08
Impact shock resistance	Medium
Insulation class	Class II
Fire resistance (GWEPT)	850 °C
Heat resistance (Ball pressure)	70 °C
Ambient operating temperature	-5 °C ; +60 °C
Work stress	<1000 Vac ; 1500 Vdc
Free of halogens	Yes

## Regulations

CE marking	Yes
UK marking	Yes
CMim marking	Yes
According to Regulations UNE/EN	UNE-EN 62208:2012
In accordance with the Low Voltage Electrotechnical Regulations (REBT)	Yes
According to European Directive 2014/35 / EU. Low voltage directive	Yes

## Sustainability

According to European Directive 2011/65/EU (RoHS)	The Directive 2011/65/EU (RoHS II) is not applicable as it does not correspond to the definition of Electrical and Electronical Equipment (EEE) as per article 3.1
---	--


According to European Directive  
2012/19/UE (RAEE2)

Not applicable because it does not meet the definition of Electrical and Electronic  
Equipment (EEE) as described in Article 3.1(a) of Directive 2012/19/EU (WEEE II).

## Logistics and packaging

Unit EAN code	8423220092891
EAN code container	8423220092891
EAN code packaging	18423220092898
Units packaging	1
Units carton	5
Pallet Units	75
Packaging Measurements cm	44,3x36,5x10,6
Packaging Measures cm	57,8x38,5x46
Unit weight (g)	1871,2
Container Weight (Kg)	2,1292
Packaging Weight (Kg)	11,616
Tariff code	39259010

## Sketch

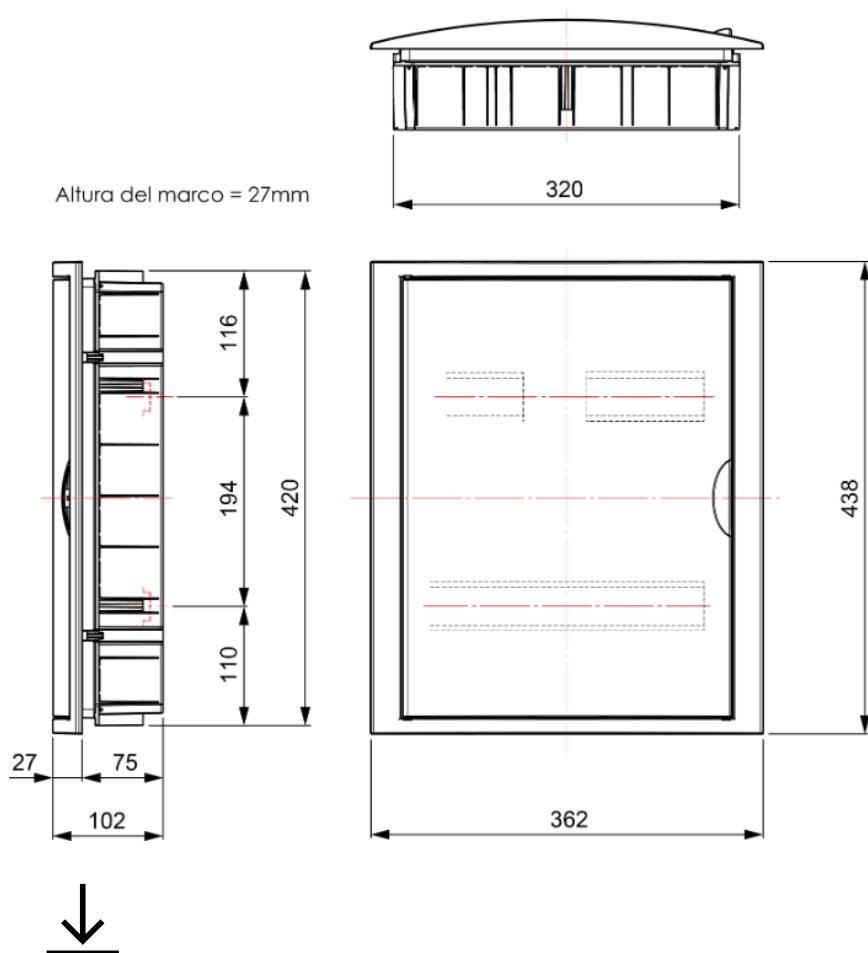

## Documentation and downloads



Commercial doc. (3.42MB)



Commercial doc. (0.34MB)



Safety Information (0.38MB)